

JC834 U.S. PTO  
06/602079  
06/22/00

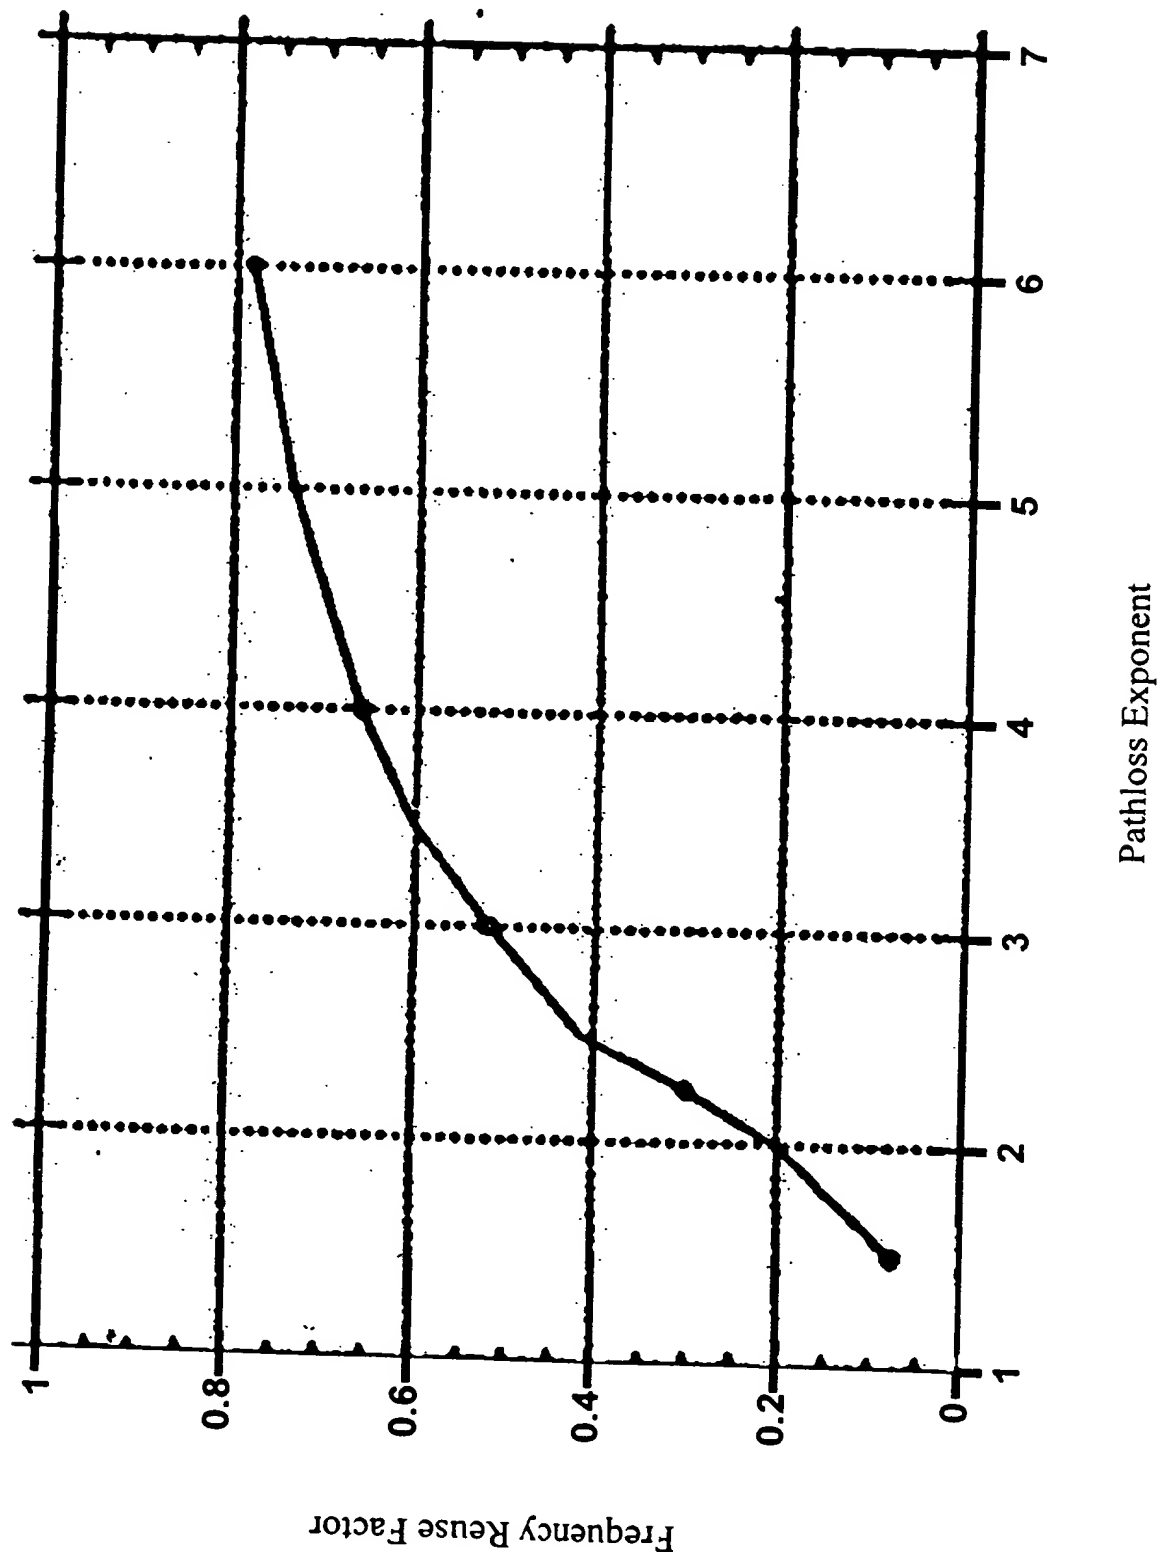


Fig. 1

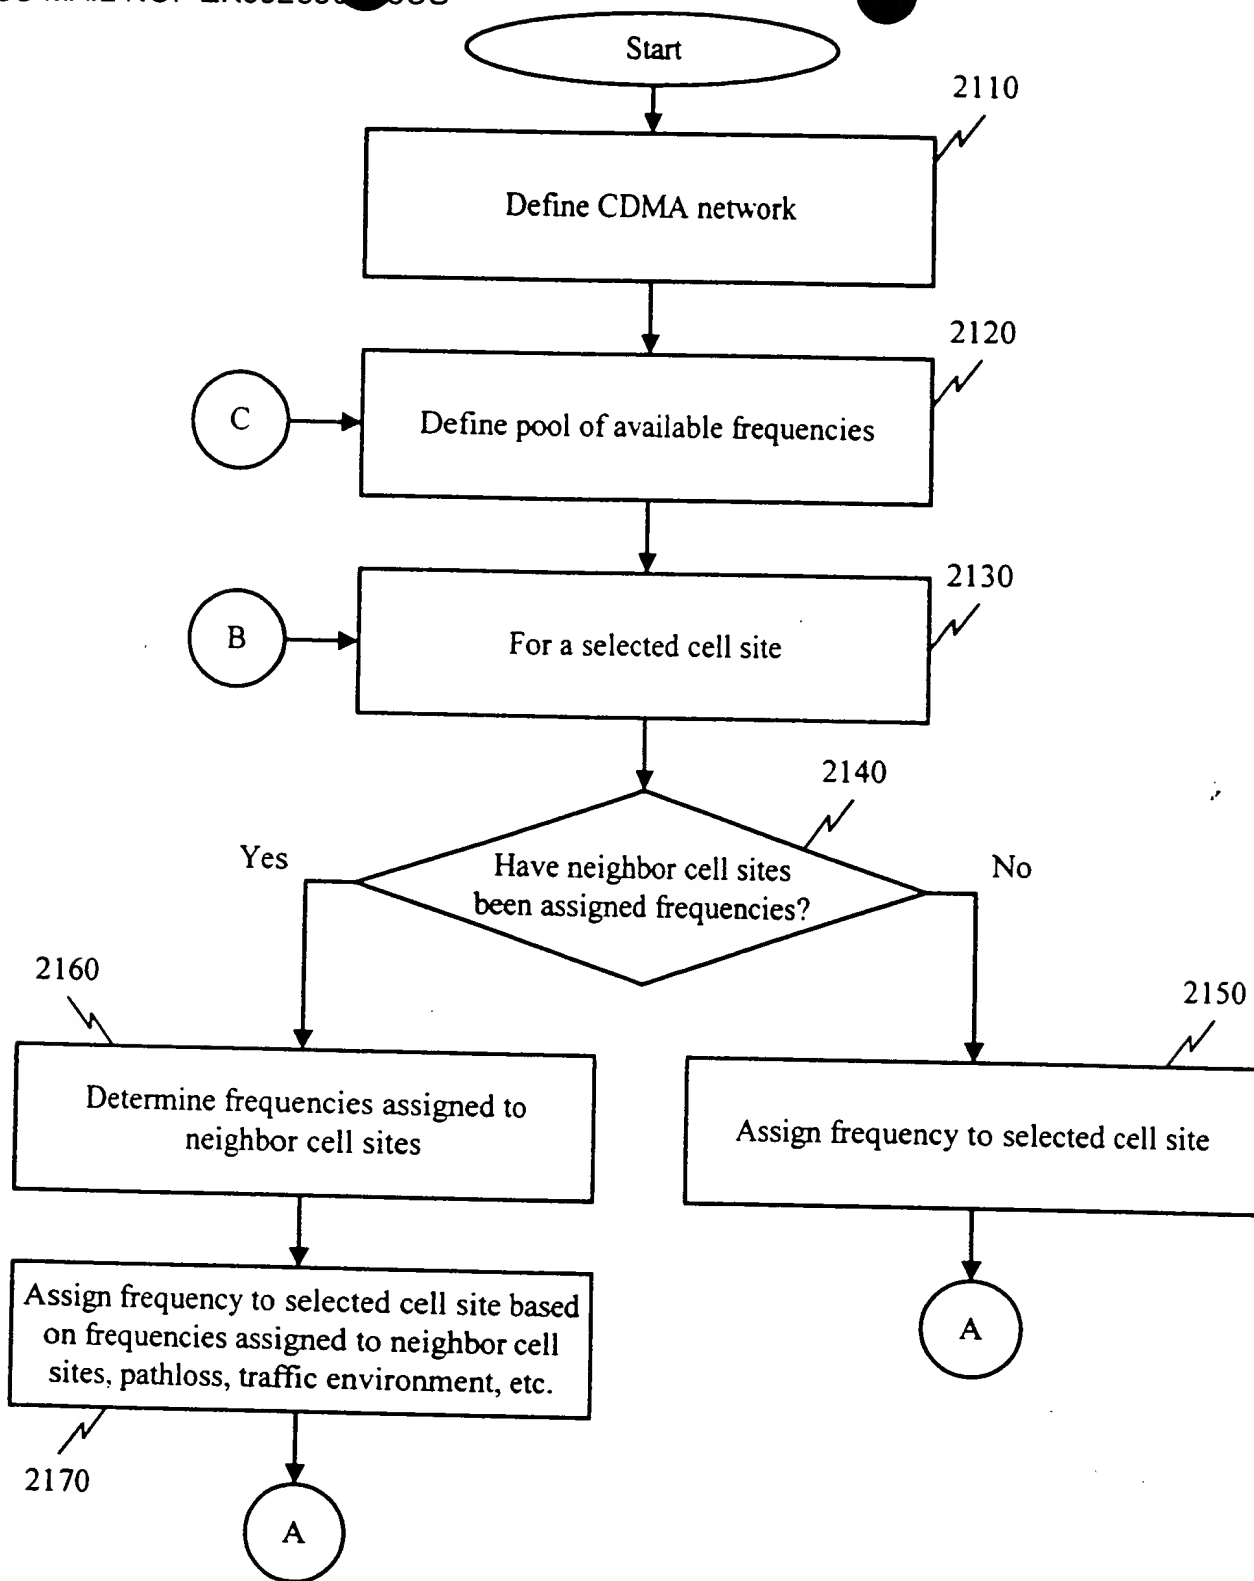


Fig. 2A

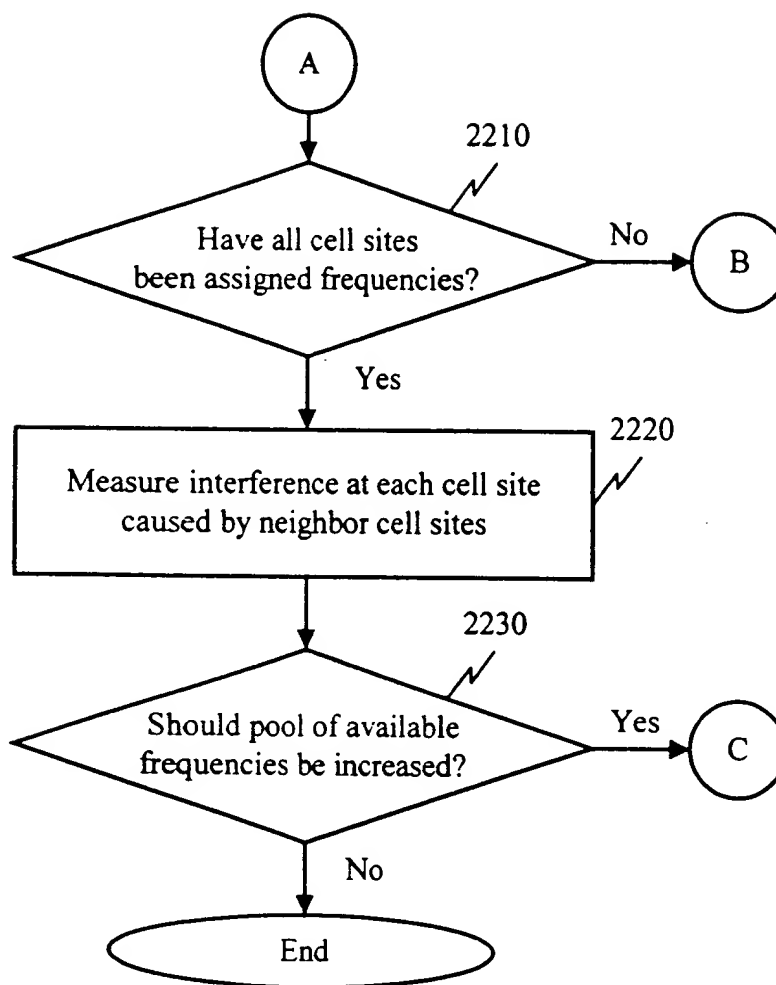


Fig. 2B

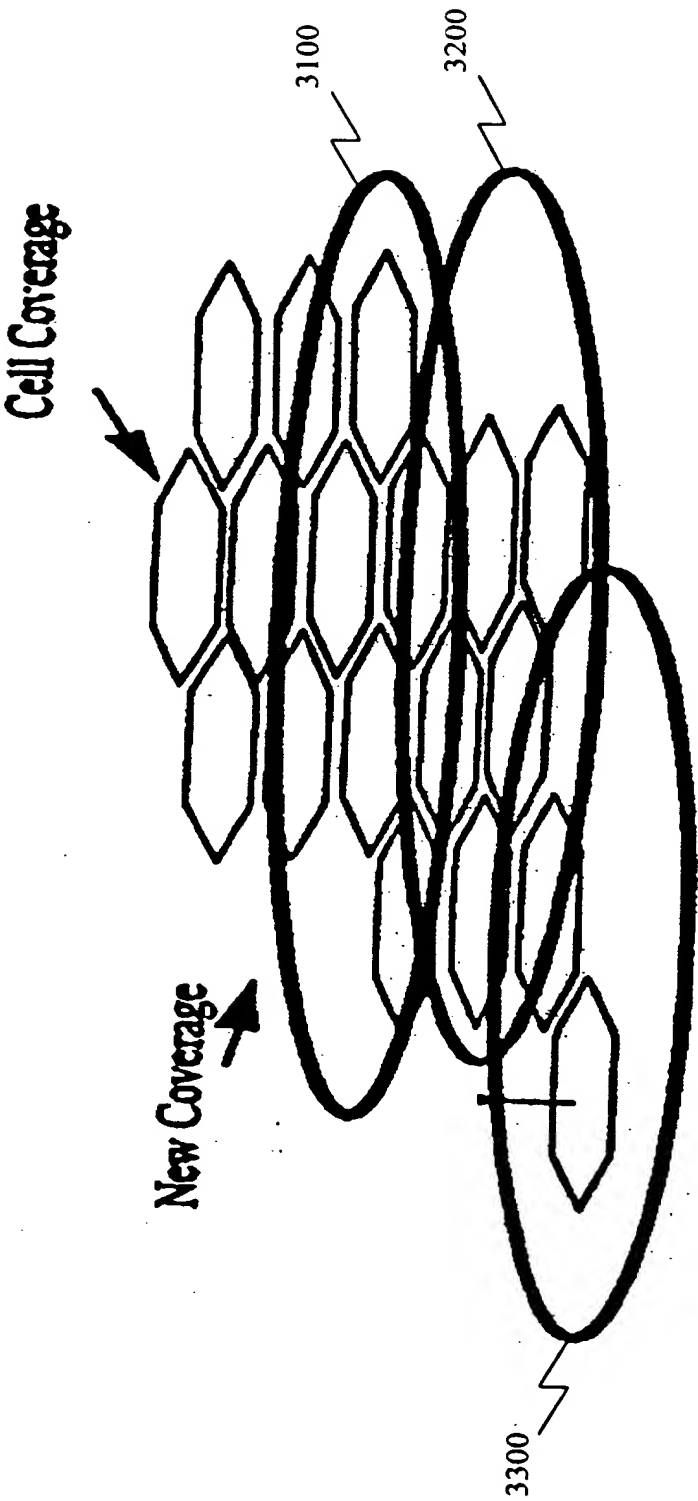


Fig. 3

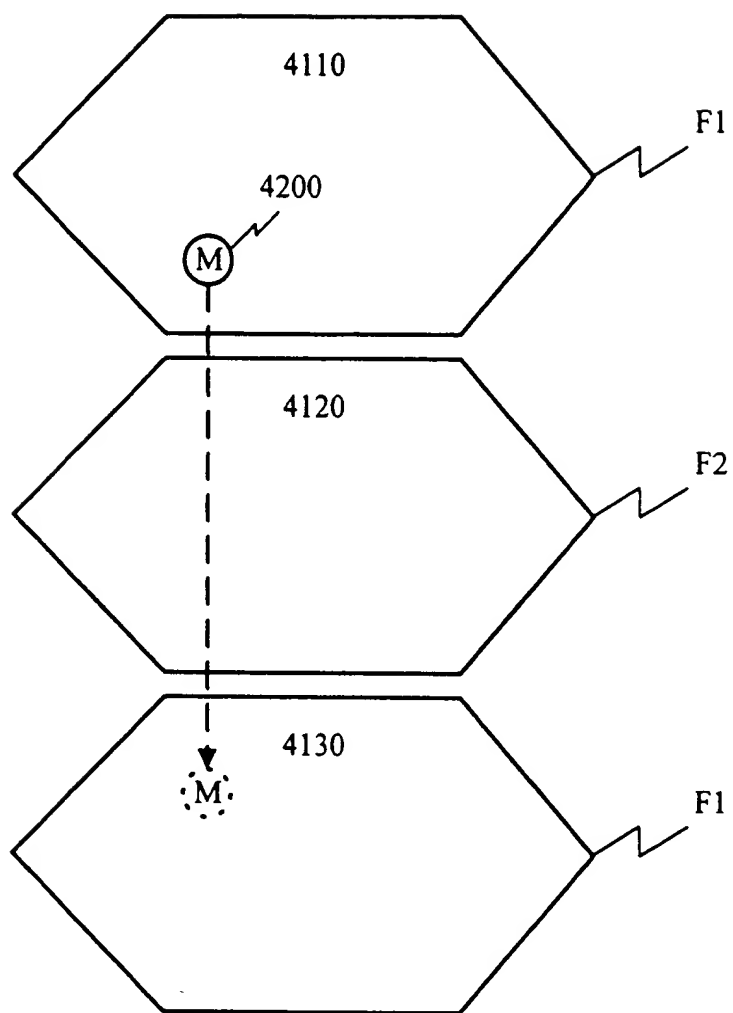


Fig. 4

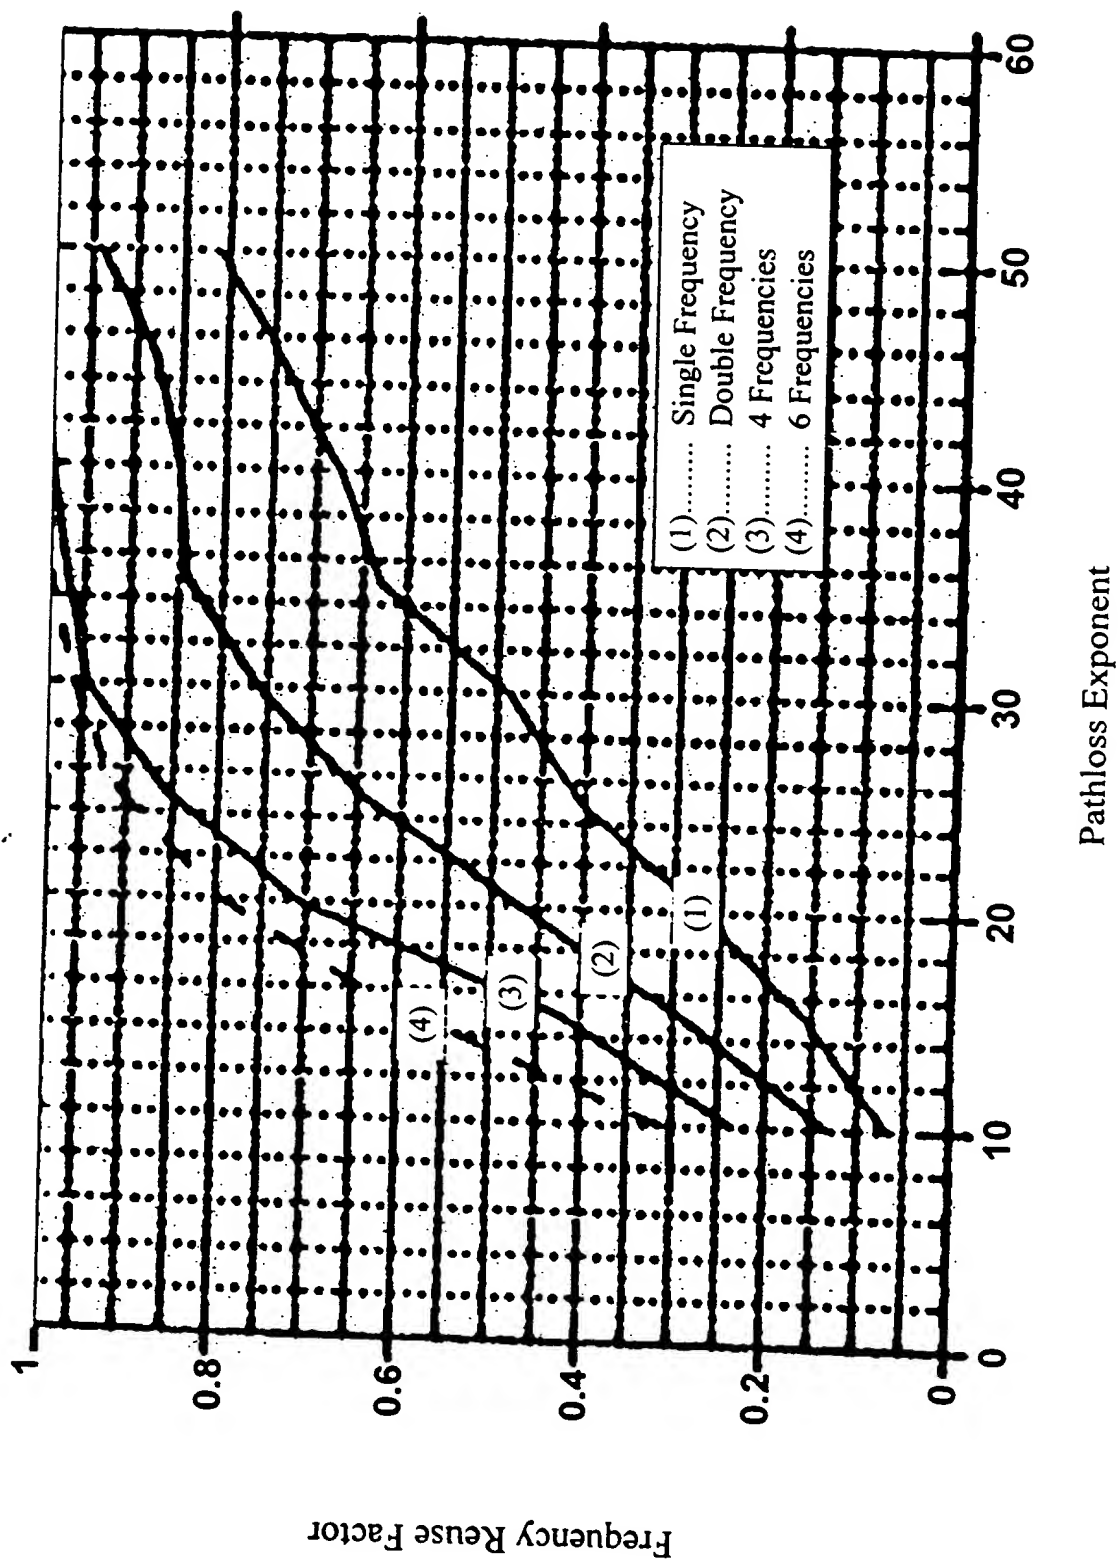


Fig. 5

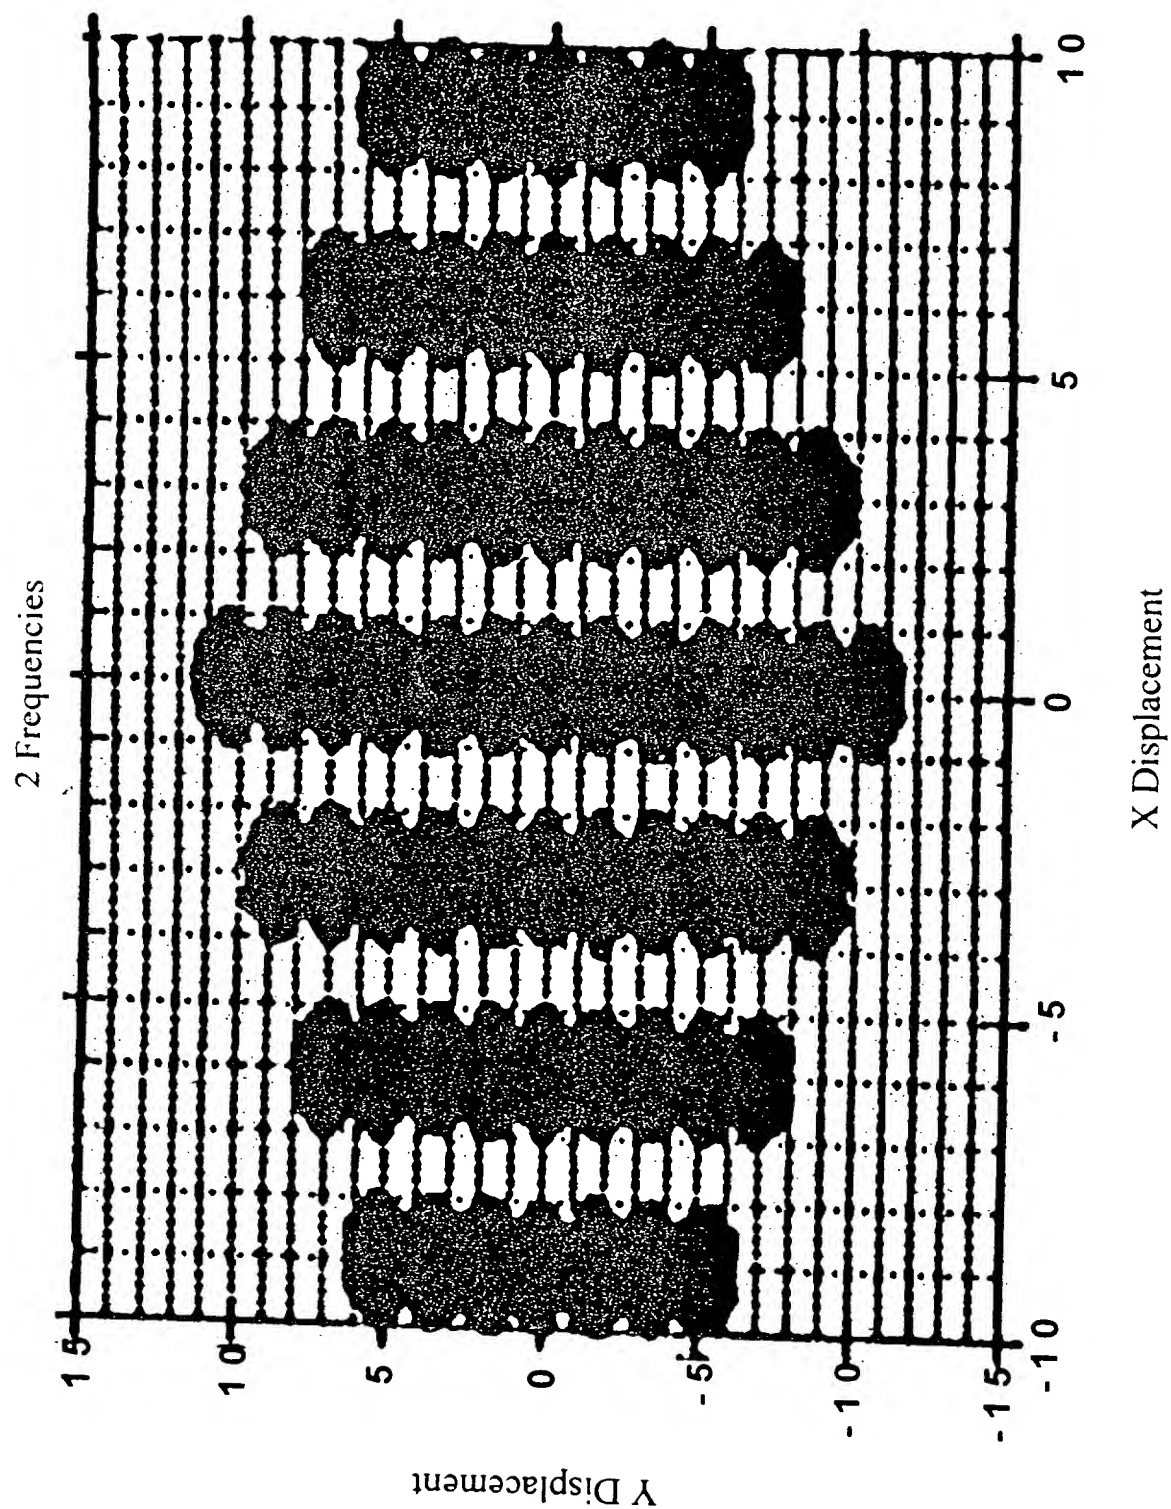


Fig. 6

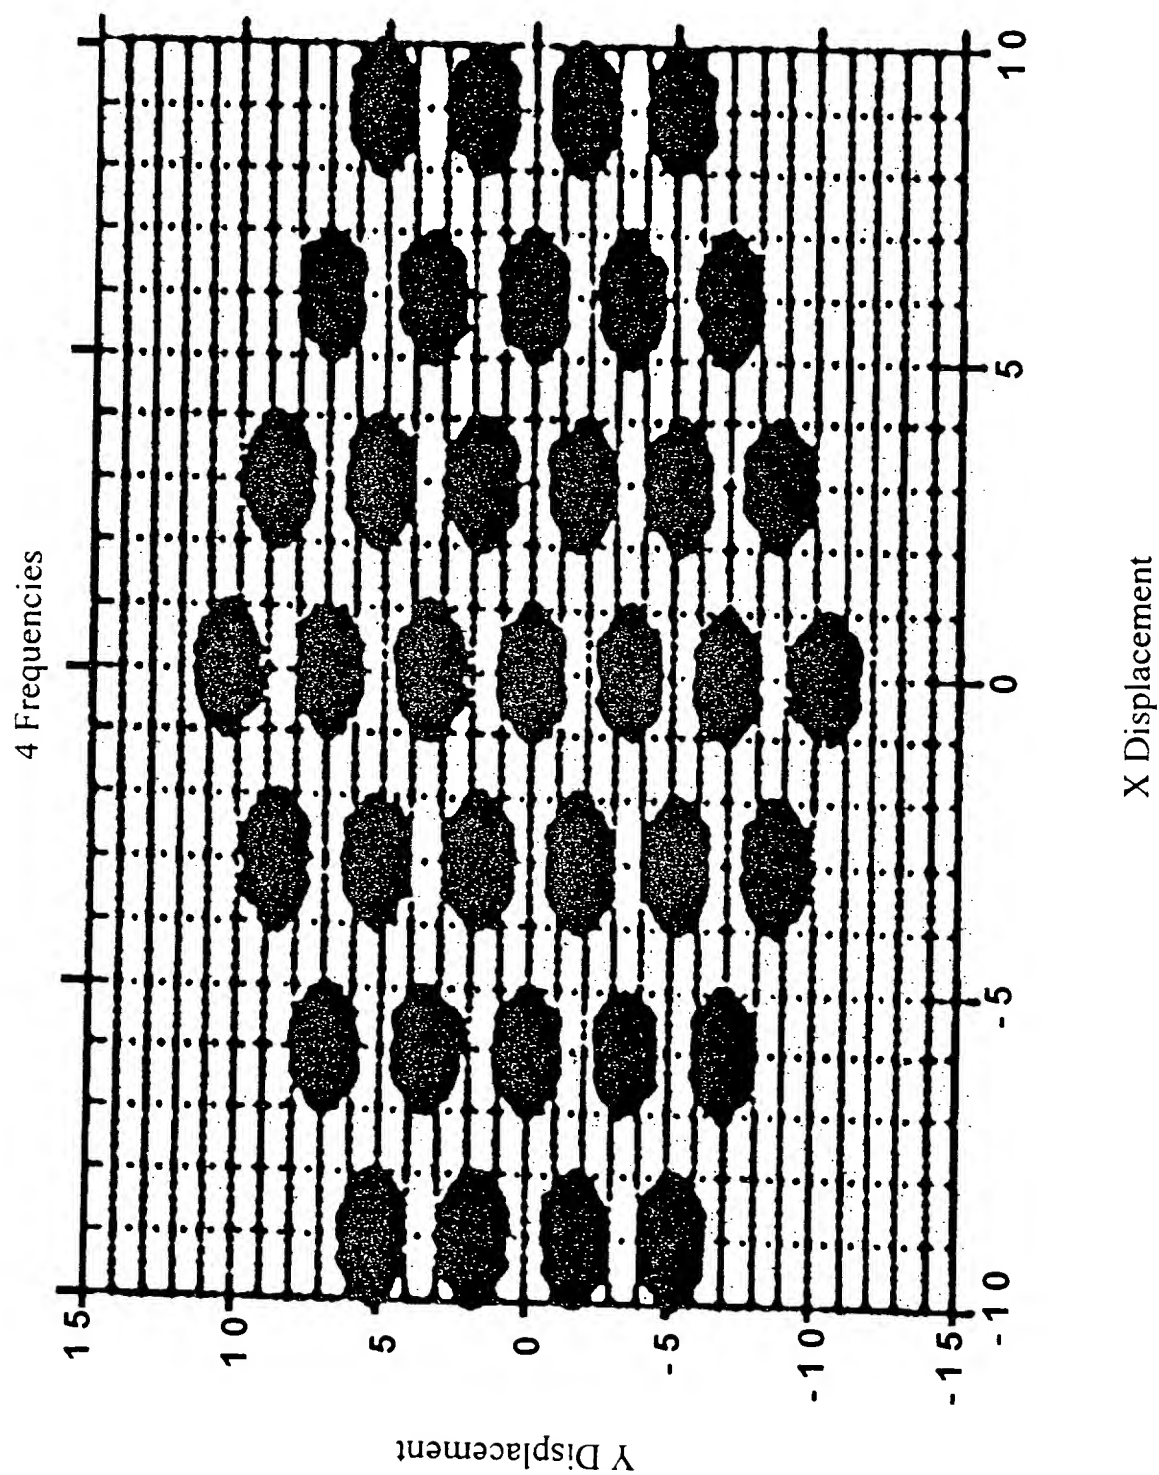


Fig. 7



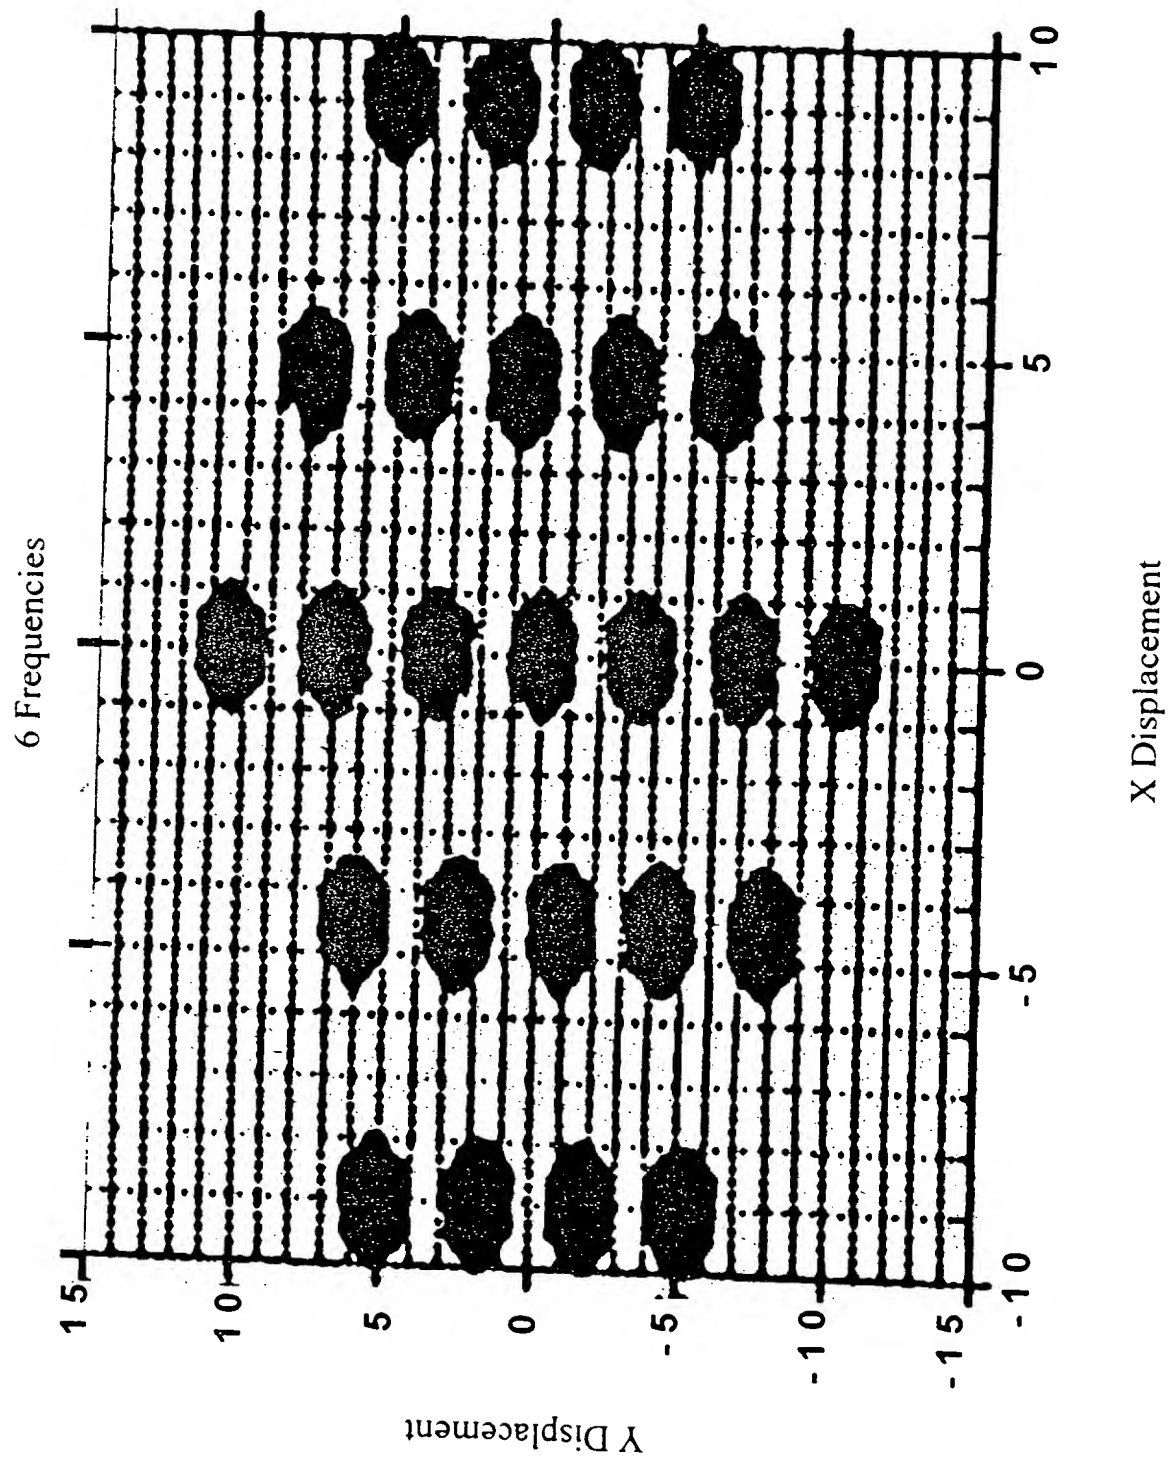


Fig. 8

002230 620360

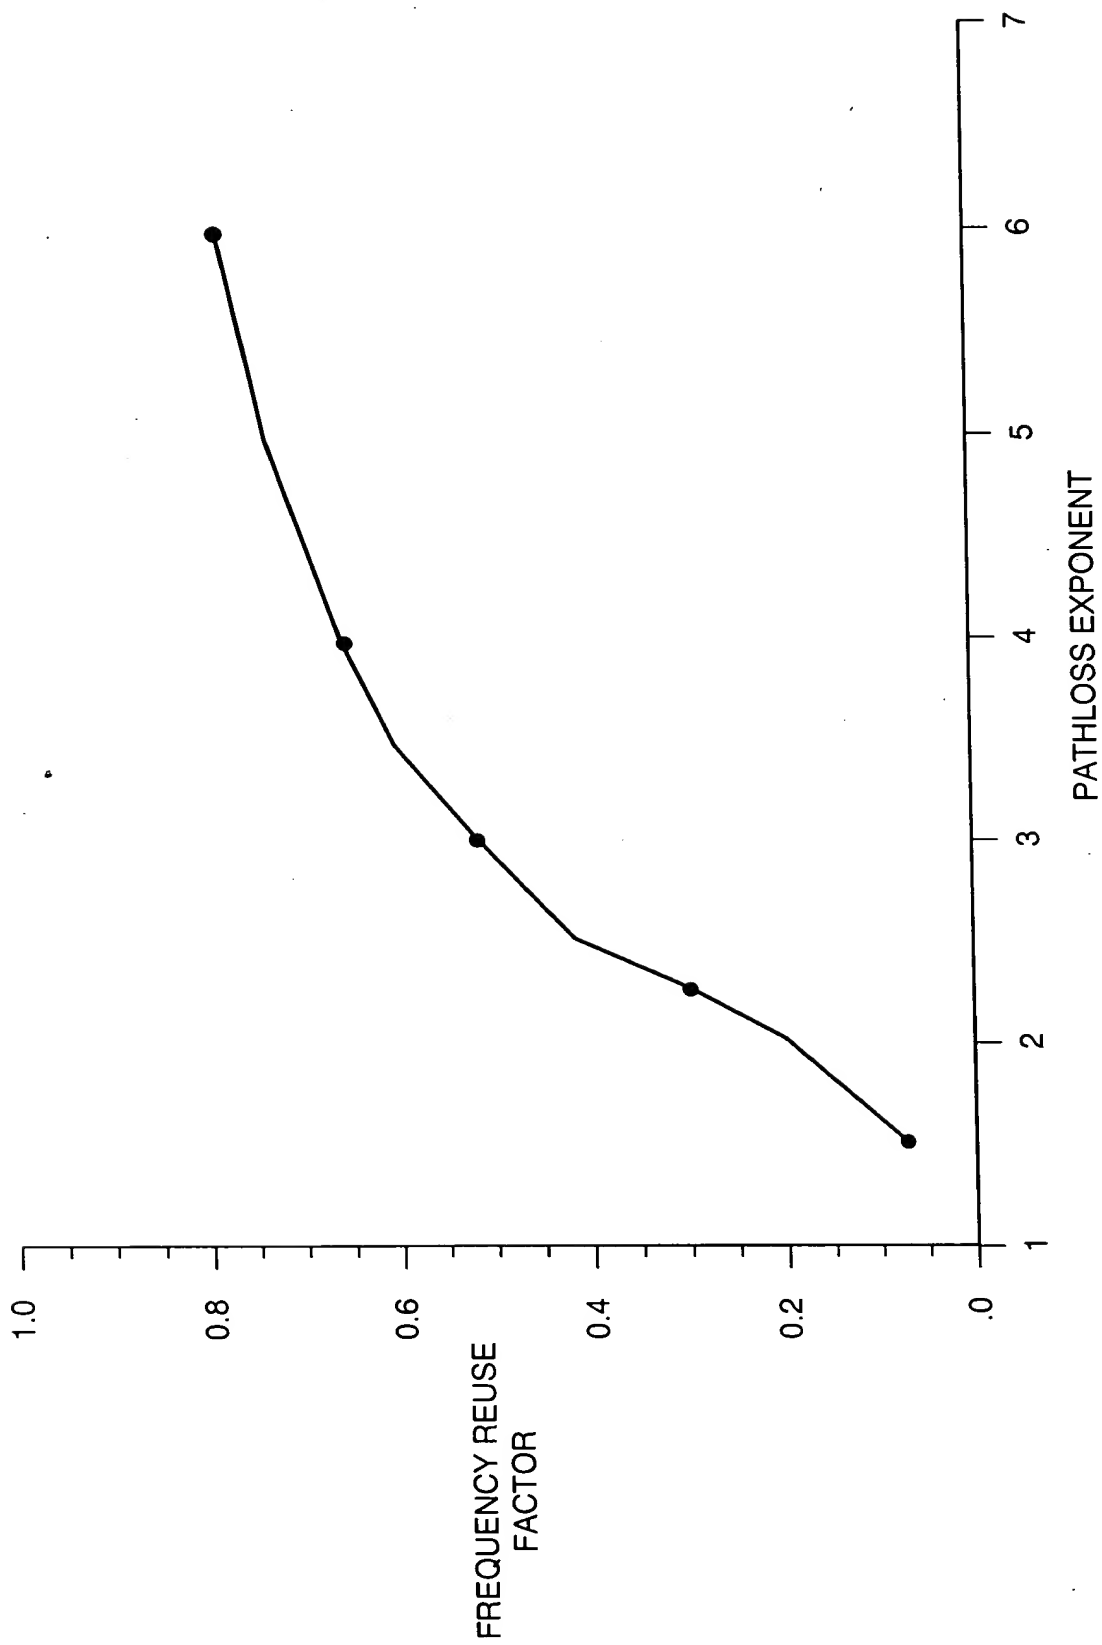


FIG. 1

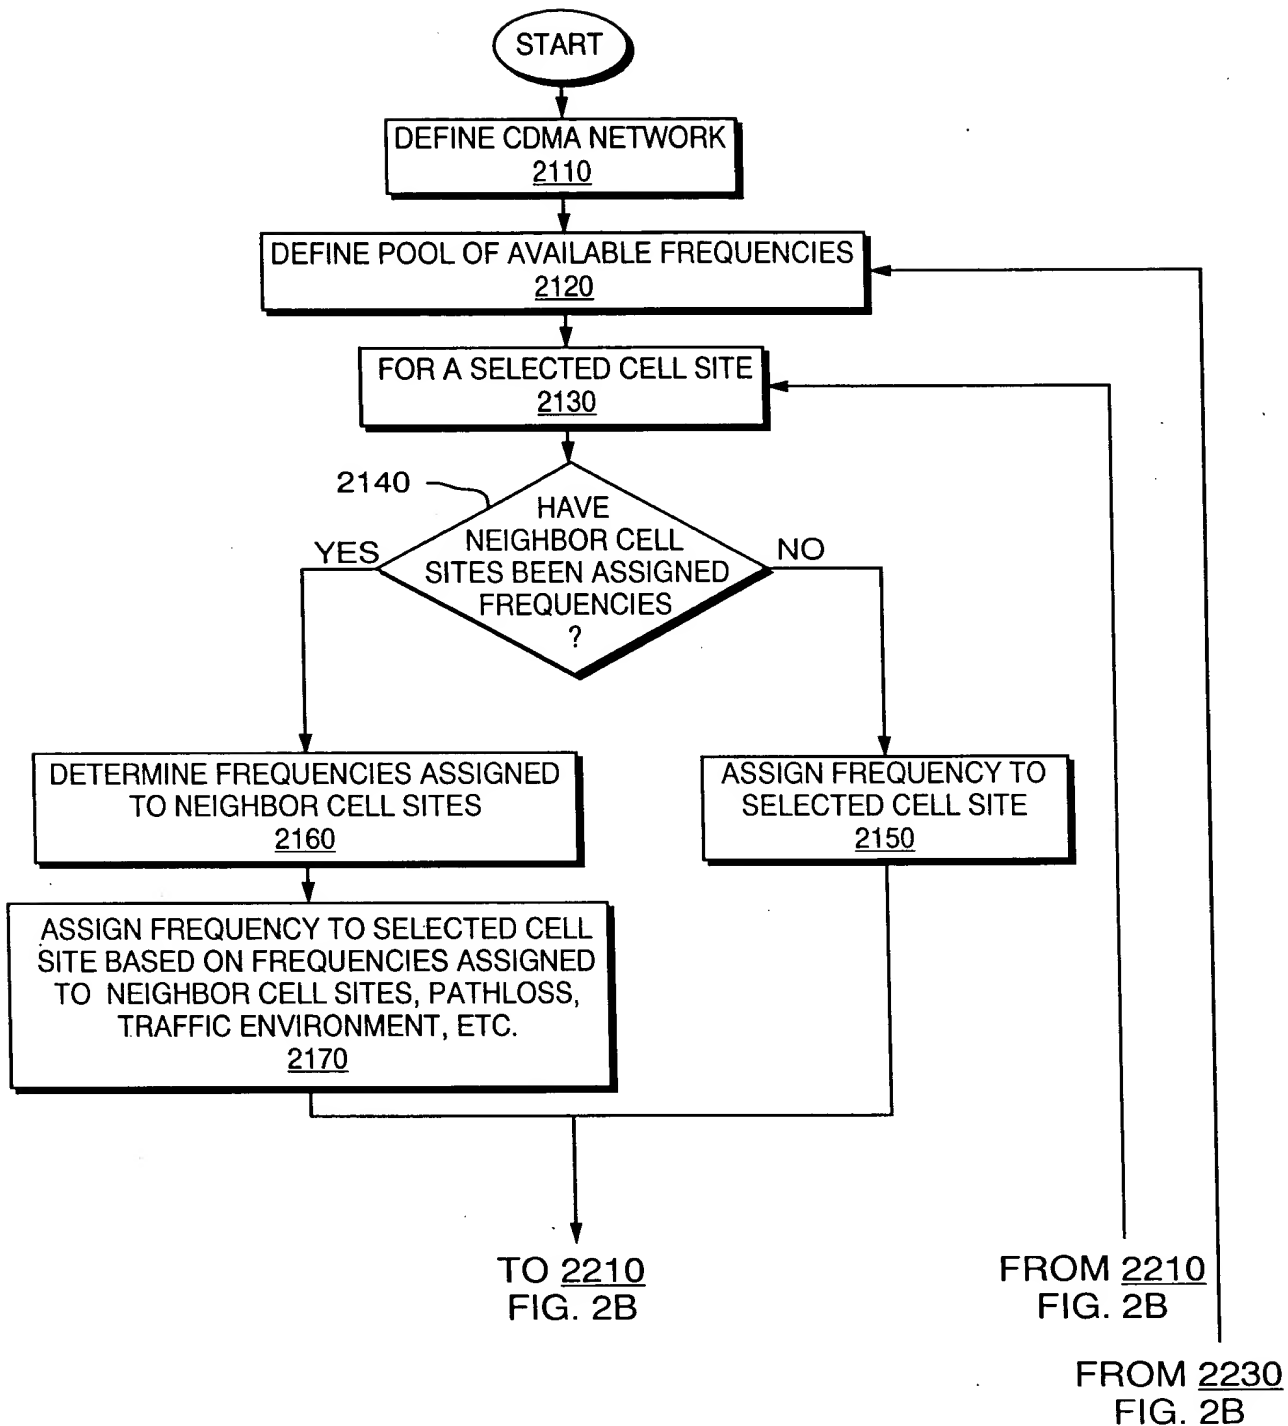


FIG. 2A

002290 6200300

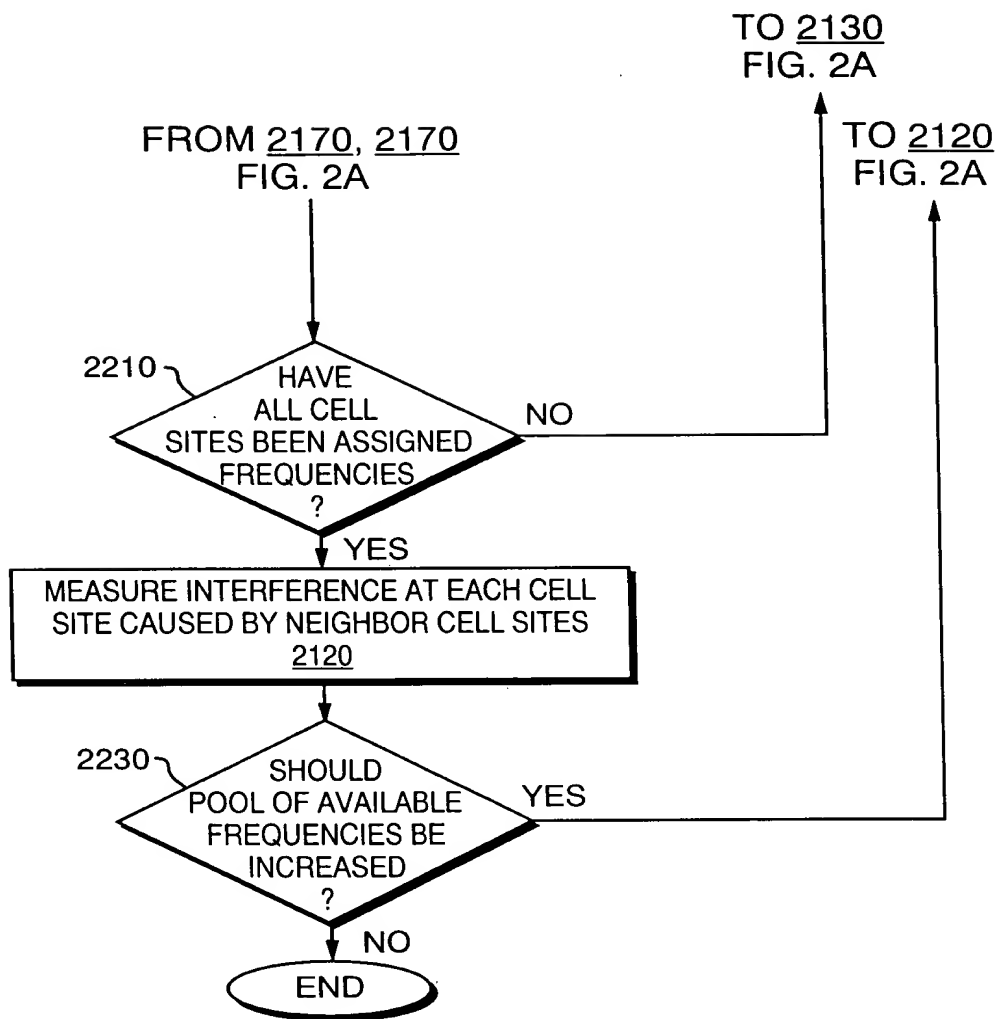


FIG. 2B



FIG. 3

Figure 4 is a schematic diagram illustrating a sequence of three hexagonal cells, labeled 4110, 4120, and 4130, arranged vertically. Each cell has a thick bottom edge labeled F1. Cell 4110 contains a solid circle labeled M, which is also labeled 4200. Cell 4120 is empty. Cell 4130 contains a dashed circle labeled M. A dashed line with an arrow points from the solid circle M in cell 4110 to the dashed circle M in cell 4130.

FIG. 4

002250" 62020360

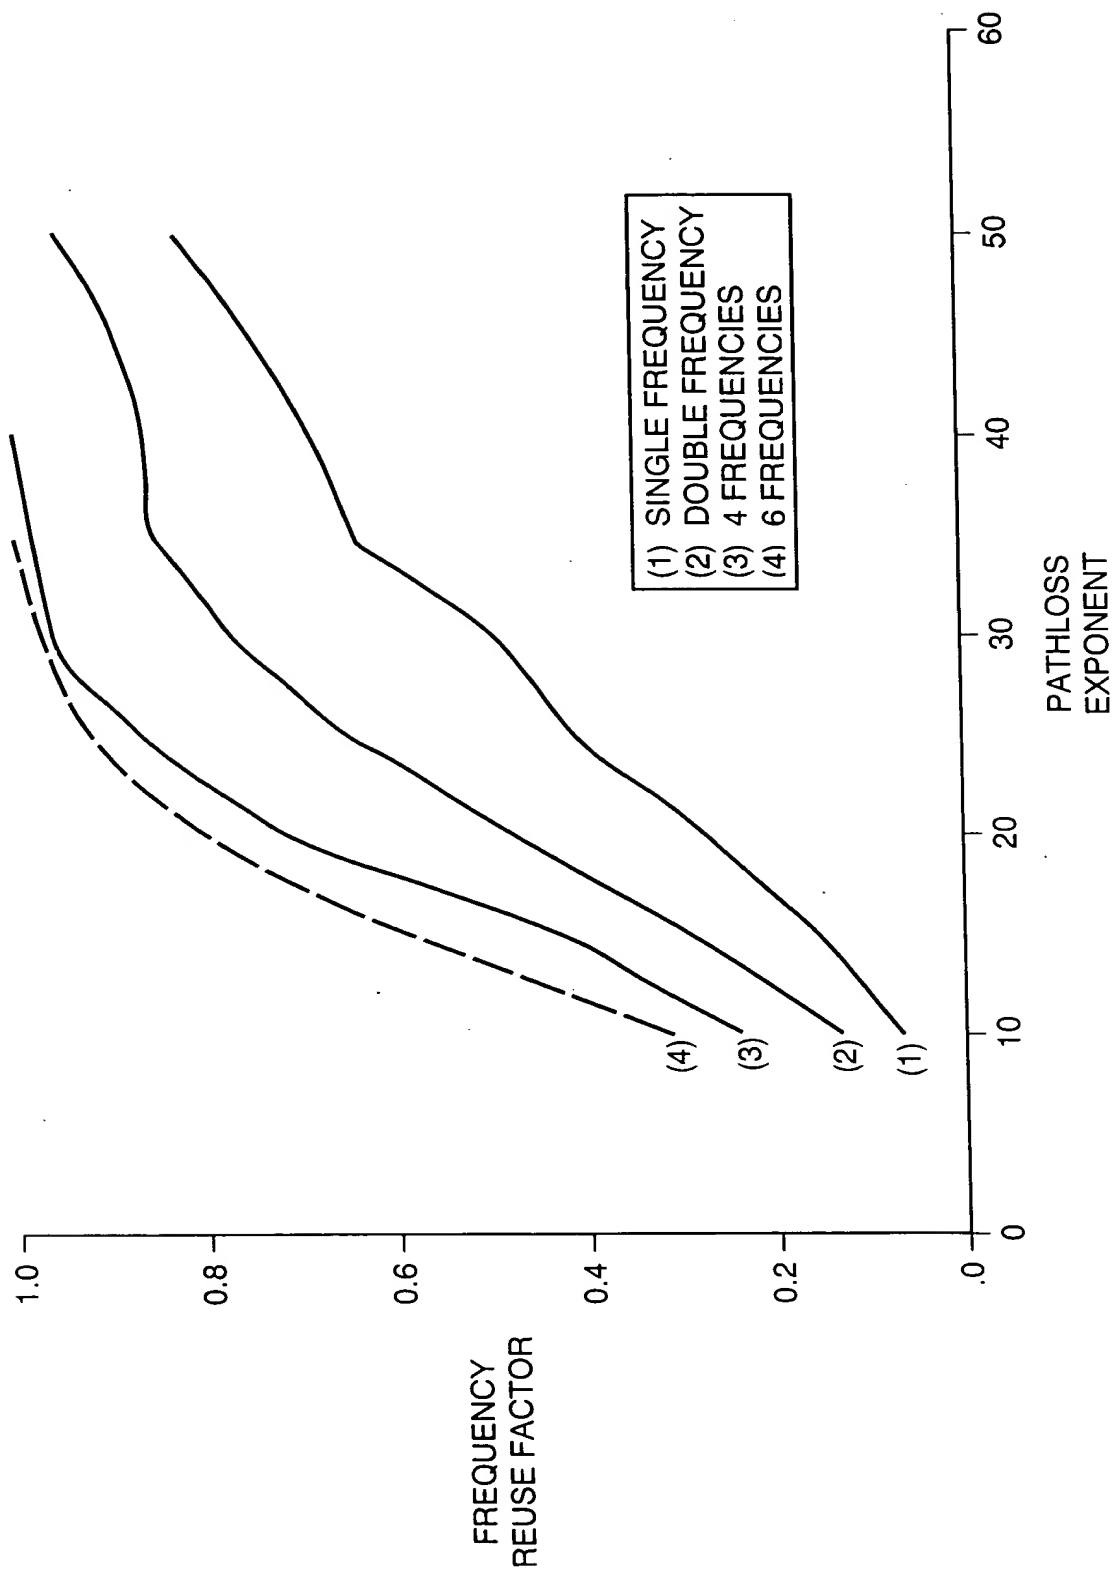


FIG. 5

002290" 62020960

2 FREQUENCIES

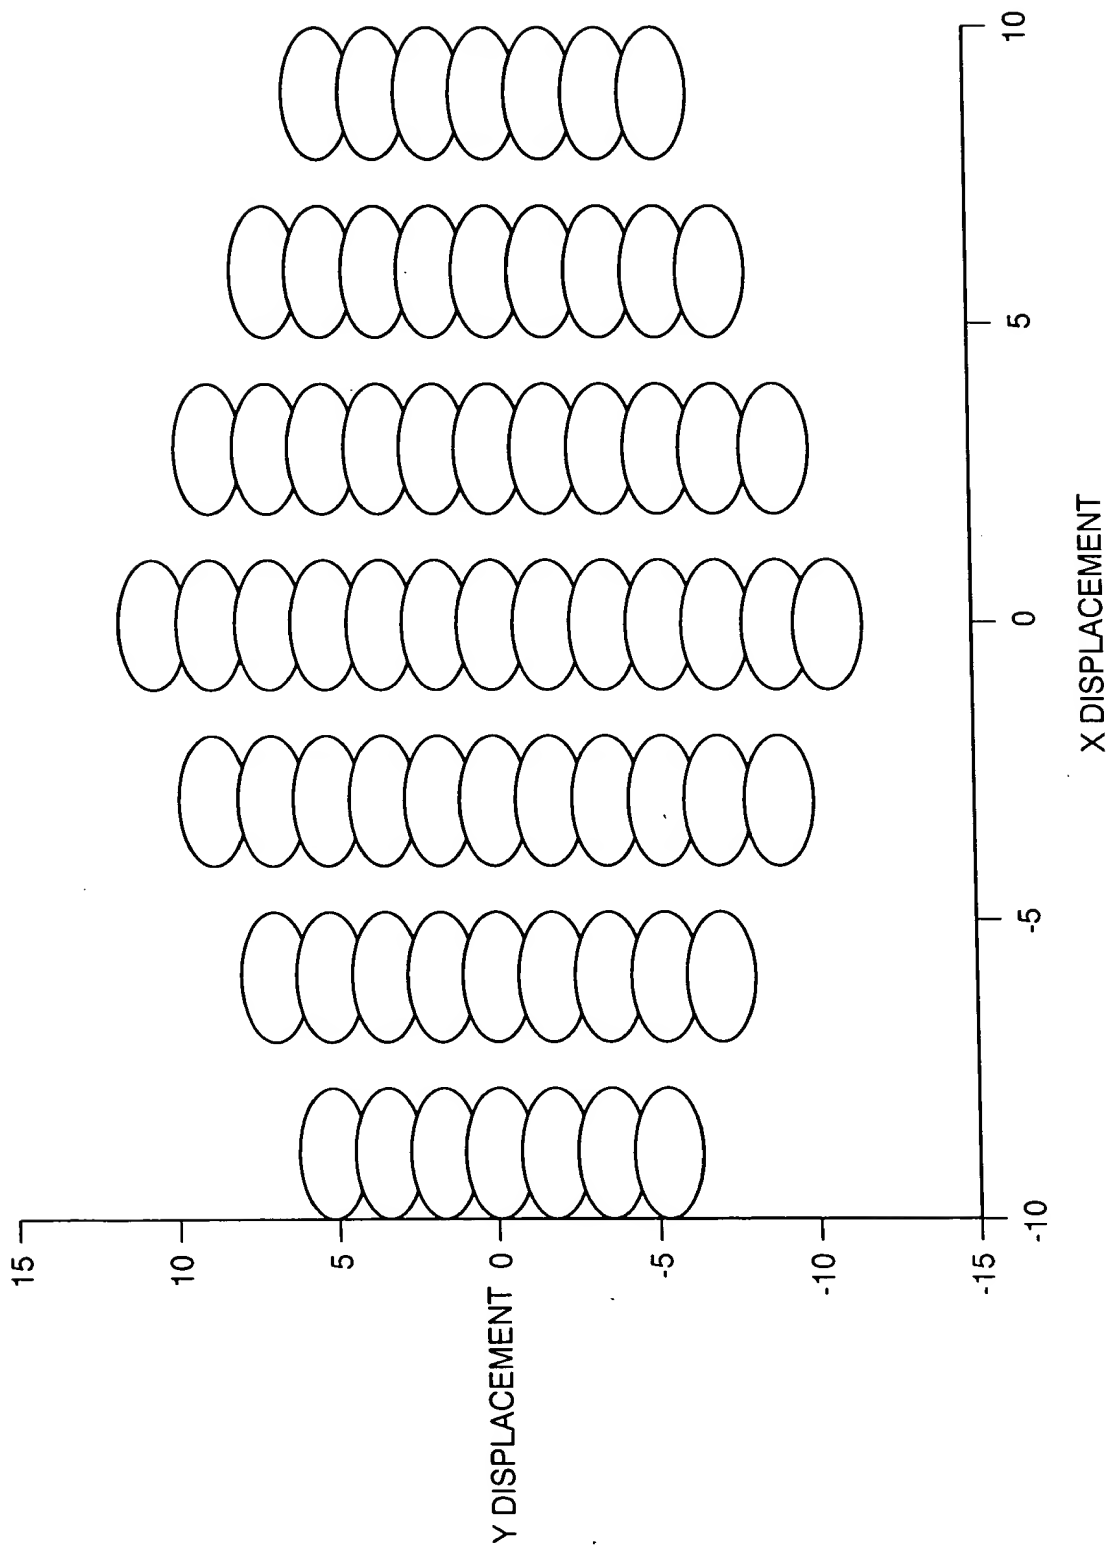


FIG. 6



002290\* 62020960

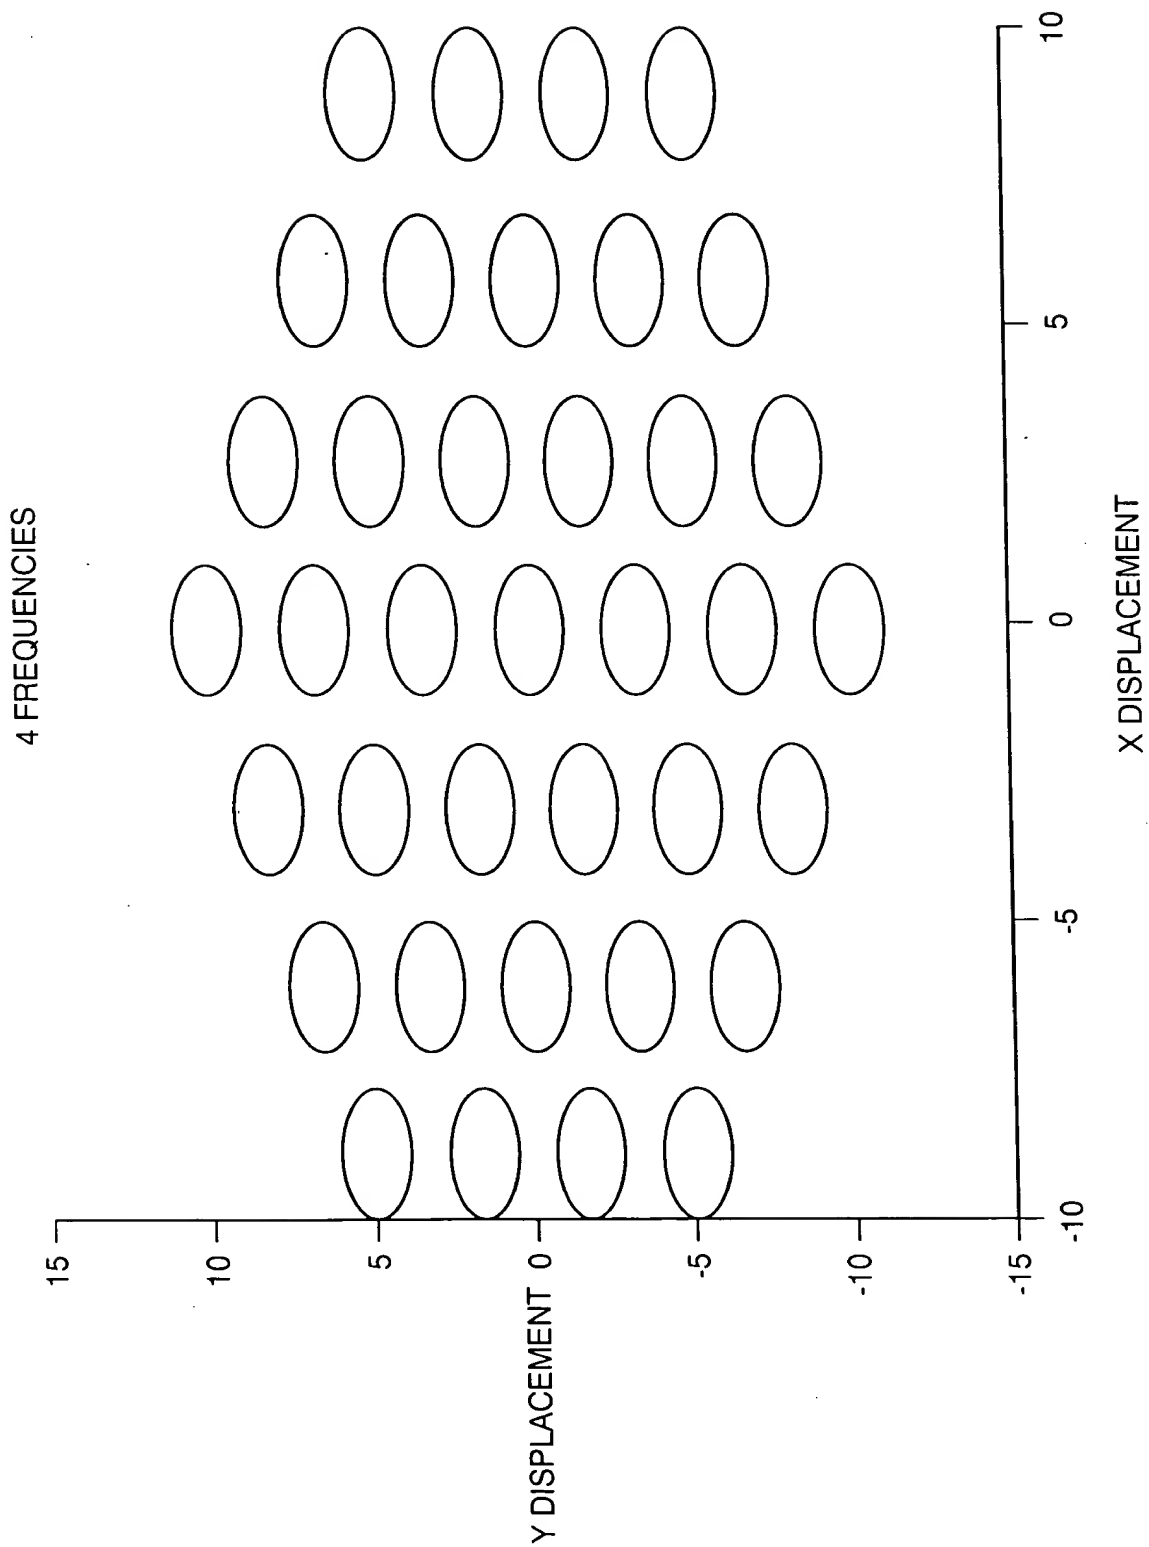


FIG. 7



000000 000000

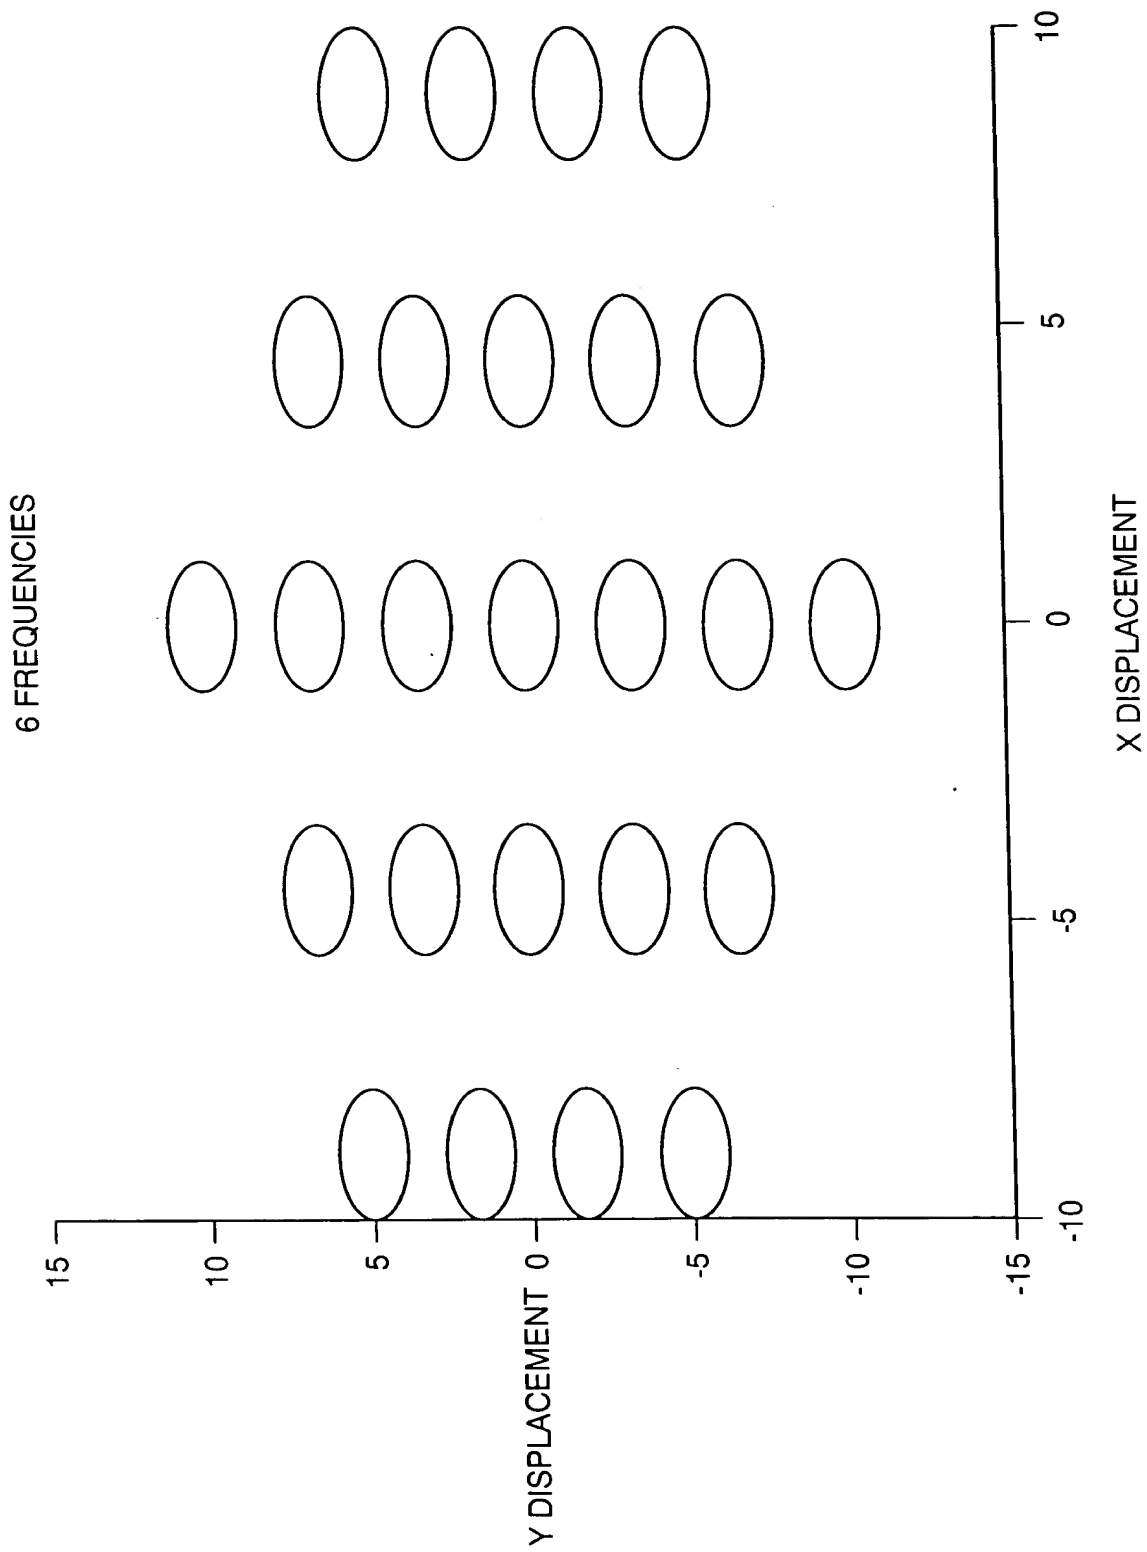


FIG. 8

